

22-2948 EMPI 68-79 Type 2 Drop Spindles.


These spindles will lower your Bus front suspension by approx. 2". The spindles will also increase the over-all front track width approx. $\frac{3}{4}$ " per side. Be certain to measure for front tire/wheel clearance before installing.

The spindles are designed to replace your stock spindles without modification. Use a qualified VW Repair Manual for removal/replacement instructions.

For 68-72 Vehicles it will be necessary to remove your drum brakes and replace with 73 & later disc brakes. These parts are available from your EMPI Dealer. It is recommended that you also change the Master Cylinder if adding Disc Brakes to your vehicle. EMPI recommends using EMPI Pt # 18-1033 Master Cylinder & Reservoir Kit.

Caliper Installation Instructions

Four caliper shim washers are provided in this kit to accommodate for machining variances between the rotor, caliper and the spindle. If necessary install the shim washers on the caliper mounting bolts, between the caliper and the spindle.

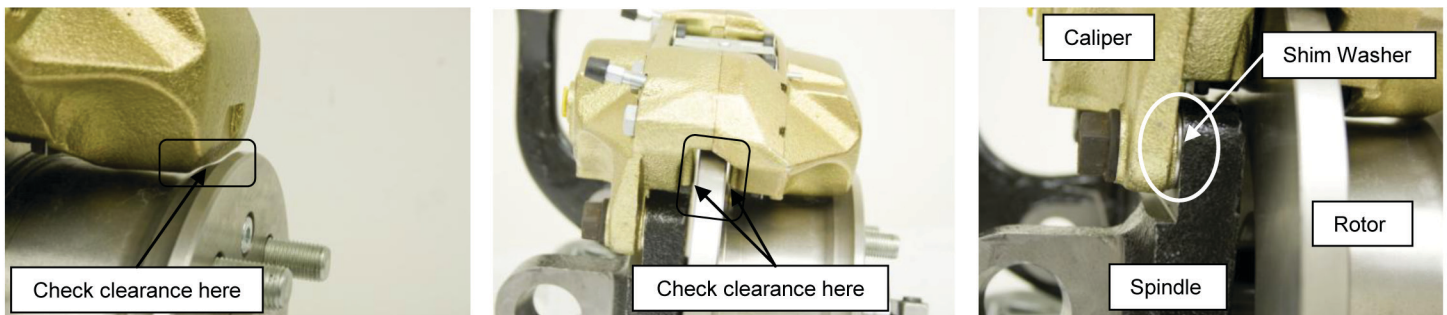

99-4375/0815

22-2948 EMPI 68-79 Type 2 Drop Spindles.


These spindles will lower your Bus front suspension by approx. 2". The spindles will also increase the over-all front track width approx. $\frac{3}{4}$ " per side. Be certain to measure for front tire/wheel clearance before installing.

The spindles are designed to replace your stock spindles without modification. Use a qualified VW Repair Manual for removal/replacement instructions.

For 68-72 Vehicles it will be necessary to remove your drum brakes and replace with 73 & later disc brakes. These parts are available from your EMPI Dealer. It is recommended that you also change the Master Cylinder if adding Disc Brakes to your vehicle. EMPI recommends using EMPI Pt # 18-1033 Master Cylinder & Reservoir Kit.

Caliper Installation Instructions

Four caliper shim washers are provided in this kit to accommodate for machining variances between the rotor, caliper and the spindle. If necessary install the shim washers on the caliper mounting bolts, between the caliper and the spindle.

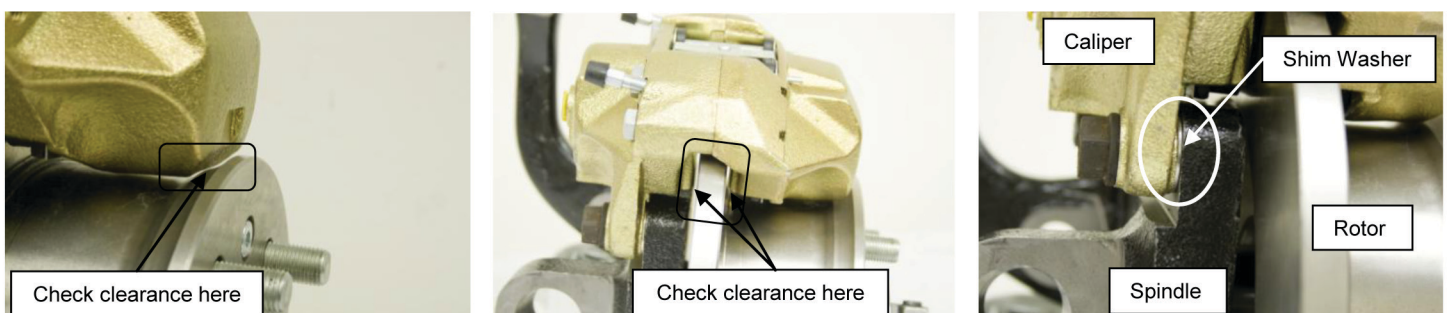

99-4375/0815